

## MODEL 1615 WARNING SIGN

### INPUT POWER

110-120 VAC, 60 HZ, Single Phase

### CURRENT DRAW

1.75 Amp @ 115 VAC

### SIGN ILLUMINATION

Two (2) 20 Watt Fluorescent Lamps

### SPIKE ILLUMINATION

150 Watt Flood Lamp

### LIGHT SENSOR

Automatically turns sign ON at dusk, OFF at dawn. A keyed override switch allows manual operation of lights.

### MOUNTING

Designed to be mounted on a 3 in. (75 mm) mounting post (not supplied).

### DIMENSIONS

Height: 24 in. (600 mm)

Width: 24 in. (600 mm)

Depth: 8 in. (200 mm)

### WEIGHT

Approximately 47 lb. (21.3 kg.)

### LISTING

ETL Listed



## MODEL 1610 TRAFFIC SPIKES

### MOUNTING

Flush, in ground unit

### SPRING LOADED

Each spike is independently spring loaded with a stainless steel spring

### HOUSING

Steel housing painted bright red for easy visibility

### SPEED


Maximum speed over the spikes is 5 MPH

(8 KPH). Excessive speed can result in damage to the unit.

(The use of speed bumps to control traffic speed is highly recommended)

Height: 6.5 in. (162.5 mm)

Width: 8.5 in. (212.5 mm)

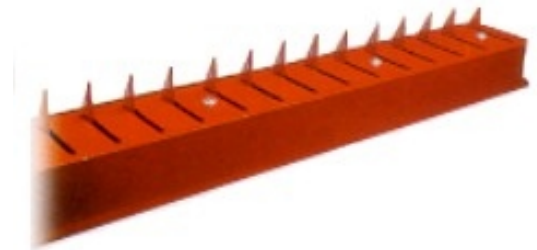

### DIMENSIONS

**Depth: 6 ft. (1.8 m)**

**WEIGHT**

**Approximately 130 lb. (58.8 kg.)**

**MODEL 1610-150 SPEED BUMPS**

**MOUNTING**

**Designed for mounting onto concrete surfaces only.**

**MATERIAL**

**Solid composite. Painted bright yellow.**

**DIMENSIONS**

**Height: 2 in. (50 mm)**

**Width: 11.5 in. (287.5 mm)**

**Length: 6 ft. (1.8 m)**

**WEIGHT**

**Approximately 27 lb. (12.2 kg.)**

